



IMPROVED CERTIFICATIONS SEARCH TOOL. REGISTER NOW!

[LEARN MORE](#)

QQQX2.E72873

Electrically Isolated Semiconductor Devices - Component

If you notice a change to your QQQX2 Listing Card, click [here](#) to learn more.

[Page Bottom](#)

Electrically Isolated Semiconductor Devices - Component

[See General Information for Electrically Isolated Semiconductor Devices - Component](#)

IXYS SEMICONDUCTOR GMBH

E72873

Edisonstrasse 15
68623 Lampertheim, GERMANY

Electrically Isolated Semiconductor Device, Model(s) GBO25-12NO1, GBO25-16NO1

Power Switching Semi-Conductors, "ISOPLUS-247 package", Model(s) C, D, I or M followed by additional numbers and letters, followed by HI, HJ, HQ or HR.

Power Switching Semi-Conductors, "ISOPLUS-247 package", Model(s) CS or DS followed by up to 10 numbers and letters, followed by R.

Power Switching Semi-Conductors, "ISOPLUS-i4", Model(s) C, D, I or M followed by two letters, followed by additional numbers and letters, followed by FB, FC, FD or FE.

Power switching semi-conductors, "ISOPLUS-i4", Model(s) CS#

Power Switching Semi-Conductors, "ISOPLUS-i4", Model(s) CS, DH, DS followed by up to 15 numbers and letters, followed by F or F1.

Power switching semi-conductors, "ISOPLUS-i4", Model(s) DS#, DSE#, FBE#, FBO#, FBS#, FCC#, FCD#, FDC#, FDD#, FDI#, FDM#, FEE#, FID#, FII#, FIO#, FMD#, FMK#, FMM#, FRR#, FSS#, FUE#, FUO#, FUS#, IXBF#, IXDF#, IXEF#, IXFF#, IXGF#, IXKF#, IXL#, IXSF#, IXUF#

Power Switching Semi-Conductors, "ISOPLUS220 package", Model(s) C, D, I or M followed by additional numbers and letters, followed by PI or PJ.

Power Switching Semi-Conductors, "ISOPLUS220 package", Model(s) CS, DS or DG followed by numbers and letters, followed by C.

Power switching semi-conductors, Model(s) 40370-32*

Power Switching Semi-Conductors, Model(s) C, D, I or M followed by two letters, followed by additional numbers and letters, followed by NA.

Power Switching Semi-Conductors, Model(s) C, D, I, and M followed by numbers and/or letters, followed by GU, GV, GW, GX, GY or GZ.

Power Switching Semi-Conductors, Model(s) C, D, I, and M followed by numbers and/or letters, followed by LA, LB, LC, or LD.

Power Switching Semi-Conductors, Model(s) CS followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) D followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) D, C, M or I followed by additional letters and/or numbers, followed by PN or PM.

Power Switching Semi-Conductors, Model(s) DS followed by additional letters and/or numbers, followed by M.

Power switching semi-conductors, Model(s) DSEI....P, DSEK....P

Power Switching Semi-Conductors, Model(s) GUO followed by numbers, followed by "-", followed by numbers, followed by NO1.

Power Switching Semi-Conductors, Model(s) ISOPLUS-264 Models C, D, I or M, followed by two letters, followed by additional numbers and letters, followed by KI, KJ, KK, KL, KM, KN, KO, KP, KQ, KR, KS, KT, KU, KV. Models IXBL, IXFL, IXTL or LKK, followed by additional numbers and letters

Power Switching Semi-Conductors, Model(s) IX (single phase) followed by two numbers, followed by MB, followed by three numbers.

Power Switching Semi-Conductors, Model(s) IX (three phase) followed by two numbers, followed by MT, followed by three numbers.

Power Switching Semi-Conductors, Model(s) IX followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) M followed by two letters, followed by additional numbers and letters, followed by JA, JB, JC, JD or JE.

Power Switching Semi-Conductors, Model(s) MC and M followed by two letters, followed by additional numbers or letters, followed by VB or VC.

Power Switching Semi-Conductors, Model(s) MC, MD, MI or MM followed by two letters, followed by additional numbers and letters, followed by ED, EH, SF, or SH.

Power Switching Semi-Conductors, Model(s) MC, MD, MI or MM followed by two letters, followed by additional numbers and letters, followed by ML or MH.

Power Switching Semi-Conductors, Model(s) MC, MD, MI or MM followed by two letters, followed by additional numbers and letters, followed by TA, TB, TC, TD, TE, TF, or TG.

Power Switching Semi-Conductors, Model(s) MC, MD, MI or MM followed by two letters, followed by additional numbers and letters, followed by VA.

Power Switching Semi-Conductors, Model(s) MC, MD, MI or MM followed by two letters, followed by additional numbers and letters, followed by YA, YB, YC, YD, YE,YF, YI, YJ, YK or YL.

Power Switching Semi-Conductors, Model(s) MC, MD, MI, and MM followed by 8 to 10 alphanumeric characters, followed by MI.

Power Switching Semi-Conductors, Model(s) MC, MD, MI, and MM followed by 8 to 10 alphanumeric characters, followed by SA.

Power Switching Semi-Conductors, Model(s) MC, MD, MI, and MM followed by 8 to 11 alphanumeric characters, followed by CA, CB, CC, CD, CE, CF, CG, CH.

Power Switching Semi-Conductors, Model(s) MC, MD, MI, or MM followed by two letters, followed by additional numbers and letters, followed by KA, KB, KC, KD or KE.

Power Switching Semi-Conductors, Model(s) MC, MD, MI, or MM followed by two letters, followed by additional numbers or letters, ending with VH.

Power Switching Semi-Conductors, Model(s) MCC, MCD, MCK, MDC, or MDD followed by 120 through 200.*

Power Switching Semi-Conductors, Model(s) MCC, MCD, MDA, MDC, or MDD followed by numbers between 19 and 100.*

Power Switching Semi-Conductors, Model(s) MCC, MCD, MDC, or MDD followed by 170 through 350.*

Power switching semi-conductors, Model(s) MCC165*, MCC220*, MCC250*, MCC310*, MCD165*, MCD220*, MCD250*, MCD310*

Power switching semi-conductors, Model(s) MCO or MDO, followed by 400 through 650.*

Power switching semi-conductors, Model(s) MDC165*, MDC220*, MDC250*, MDC310*, MDD165*, MDD220*, MDD250*, MDD310*

Power Switching Semi-Conductors, Model(s) MDI followed by 90 through 1550*

Power switching semi-conductors, Model(s) MDI, MID or MII, followed by 20 through 150.*

Power Switching Semi-Conductors, Model(s) MEA, MEE, MEK, MPK or MEO followed by numbers between 50 and 240.*

Power Switching Semi-Conductors, Model(s) MEA, MEE, MEK, or MEO followed by 150 through 600.*

Power Switching Semi-Conductors, Model(s) MID followed by 90 through 1550*

Power Switching Semi-Conductors, Model(s) MIE followed by 90 through 1550*

Power Switching Semi-Conductors, Model(s) MII followed by 90 through 1550*

Power Switching Semi-Conductors, Model(s) MIO followed by 90 through 1550*

Power switching semi-conductors, Model(s) MIO, VIO or VMO, followed by 200 through 1200.*

Power switching semi-conductors, Model(s) MLO 100*, MLO 36*, MLO 50*, MLO 75*, MLO....7, MMO 36*, MMO 50*, MMO 75*

Power Switching Semi-Conductors, Model(s) MMO, MCO, MCD followed by additional numbers, followed by io1 or io6.

Power switching semi-conductors, Model(s) MMO....7

Power Switching Semi-Conductors, Model(s) MUBW, MWI or MKI followed by additional numbers and/or letters, followed by 7or 8, may be followed by T.

Power Switching Semi-Conductors, Model(s) MUBW, MWI, or MKI followed by additional numbers and /or letters, followed by 6K.

Power Switching Semi-Conductors, Model(s) MWI followed by additional numbers and/or letters, followed by 9.

Power Switching Semi-Conductors, Model(s) MWI followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power Switching Semi-Conductors, Model(s) VBBW followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VBE*, VBE.. .NO7

Power Switching Semi-Conductors, Model(s) VBEF followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power Switching Semi-Conductors, Model(s) VBH followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VBO or VUO, followed by 10 through 125.*

Power switching semi-conductors, Model(s) VBO or VUO, followed by 50 through 100.*

Power switching semi-conductors, Model(s) VBO...7, VBO...NO7, VBO13*, VBO14*, VBO15*, VBO16*, VBO17*, VBO18*, VBO19*, VBO20*, VBO21*, VBO22*, VBO23*, VBO24*, VBO25*, VBO26*, VBO27*, VBO28*, VBO29*, VBO30*, VBO31*, VBO32*, VBO33*, VBO34*, VBO35*, VBO36*, VCA....7, VCC....7, VCD....7, VCK....7, VCO....7

Power Switching Semi-Conductors, Model(s) VDD may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VDI followed by 90 through 1550*

Power switching semi-conductors, Model(s) VDI...P1, VDI100*, VDI25*, VDI50*, VDI75*, VEE*, VGO...7, VH013*, VH014*, VH015*, VH016*, VH017*, VH018*, VH019*, VH020*, VH021*, VH022*, VH023*, VH024*, VH025*, VH026*, VH027*, VH028*, VH029*, VH030*, VH031*, VH032*, VH033*, VH034*, VH035*, VH036*, VHF*, VHF...7, VHF13*, VHF14*, VHF15*, VHF16*, VHF17*, VHF18*, VHF19*, VHF20*, VHF21*, VHF22*, VHF23*, VHF24*, VHF25*, VHF26*, VHF27*, VHF28*, VHF29*, VHF30*, VHF31*, VHF32*, VHF33*, VHF34*, VHF35*, VHF36*, VHF*, VHM...7, VHO....7

Power Switching Semi-Conductors, Model(s) VID followed by 90 through 1550*

Power Switching Semi-Conductors, Model(s) VID may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power switching semi-conductors, Model(s) VID....P1, VID100*, VID25*, VID50*, VID75*

Power Switching Semi-Conductors, Model(s) VIE followed by 90 through 1550*

Power Switching Semi-Conductors, Model(s) VII followed by 90 through 1550*

Power switching semi-conductors, Model(s) VII....7, VII....P1, VII100*, VII25*, VII50*, VII75*, VIO....P1, VK013*, VK014*, VK015*, VK016*, VK017*, VK018*, VK019*, VK020*, VK021*, VK022*, VK023*, VK024*, VK025*, VK026*, VK027*, VK028*, VK029*, VK030*, VK031*, VK032*, VK033*, VK034*, VK035*, VK036*, VKI....7, VKI....P1, VKM...7, VKO....7

Power Switching Semi-Conductors, Model(s) VMD may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VMH may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VMK, VMM, or VMO followed by numbers between 25 and 250.*

Power Switching Semi-Conductors, Model(s) VMM followed by 90 through 1550*

Power Switching Semi-Conductors, Model(s) VMM may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power switching semi-conductors, Model(s) VMO....P1, VTO....7

Power Switching Semi-Conductors, Model(s) VUB followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VUB*

Power Switching Semi-Conductors, Model(s) VUB, VUO, or VVZB followed by additional numbers and/or letters, followed by NO1, NOX or ioX, may be followed by T.

Power switching semi-conductors, Model(s) VUB...P1, VUB...PO1, VUBM....P1

Power Switching Semi-Conductors, Model(s) VUBW followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VUC*

Power Switching Semi-Conductors, Model(s) VUC15 may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VUC25 may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VUC36 may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power switching semi-conductors, Model(s) VUCB*, VUE*, VUE.. .NO7, VUI*, VUI....N7

Power Switching Semi-Conductors, Model(s) VUM followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VUM*, VUM.....N7

Power Switching Semi-Conductors, Model(s) VUM24 may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VUM33 may be followed by 15, 24, 25, 33, or 36, followed by 05, 12, 14, 16, 500, 1200, 1400, or 1600, may be followed by G02, E, N01, N, PH *

Power Switching Semi-Conductors, Model(s) VUO followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VUO*, VUO...7, VUO...NO7, VUO30*, VUO50*, VUO60*

Power Switching Semi-Conductors, Model(s) VVBW followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VVY*, VVY12*, VVY24*, VVY40*

Power Switching Semi-Conductors, Model(s) VVZ followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VVZ*, VVZ....7, VVZ12*, VVZ24*, VVZ40*

Power Switching Semi-Conductors, Model(s) VVZB followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VW2X*, VW3....7, VWI....P1

Power Switching Semi-Conductors, Model(s) VWM followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VWM....7

Power Switching Semi-Conductors, Model(s) VWO followed by additional numbers and/or letters, followed by A5, DL1, io1, io2, ioX, NO1, NO2, or NOX, may be followed by T

Power switching semi-conductors, Model(s) VWO....7, VZI....P1

Power switching semi-conductors, package SOT-227B, miniBloc, Model(s) DH1X*, DH2X*, DSEI*, DSEP*, DSI*, DSS*, IXDN*, IXEN*, IXFN*, IXGN*, IXKN*, IXLN*, IXSN*, IXTN*, IXUN*, VBE*, VBO*, VBS*

Semi-conductor diodes, thyristors, IGBTs or MOSFETS, "ISOPLUS-247 package", Model(s) IXDR%, IXER%, IXFR%, IXKR%

Semi-conductor diodes, thyristors, IGBTs or MOSFETS, "ISOPLUS220 package", Model(s) IXKC*

- Followed by up to 15 numbers and letters.

% - Followed by up to 10 numbers and letters.

* - May be followed by additional numbers or letters.



Marking: Company name or trademark and model designation.

Last Updated on 2017-12-08

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".



IMPROVED CERTIFICATIONS SEARCH TOOL. REGISTER NOW!

[LEARN MORE](#)

QQQX2.E153432

Electrically Isolated Semiconductor Devices - Component

If you notice a change to your QQQX2 Listing Card, click [here](#) to learn more.

[Page Bottom](#)

Electrically Isolated Semiconductor Devices - Component

[See General Information for Electrically Isolated Semiconductor Devices - Component](#)

IXYS CORP

E153432

1590 BUCKEYE DR
MILPITAS, CA 95035-7418 USA

Power Switching Semi-Conductors, Model(s) CS followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) D followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) D, C, M or I followed by additional letters and/or numbers, followed by PN or PM.

Power Switching Semi-Conductors, Model(s) DS followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) IX followed by additional letters and/or numbers, followed by M.

Power Switching Semi-Conductors, Model(s) IX followed by an upper case letter, followed by N, followed by any number 01 through 99999, followed by additional numbers and letters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISO247 package, Model(s) IX J Series IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by J, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS I4-PAC package, Model(s) IX F Series IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by F, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS SMPD package, Model(s) IXM2001 IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by L, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS SMPD package, Model(s) MDIX4X30N65B3 IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by L, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS SMPD package, Model(s) MMIX IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by L, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS SMPD package, Model(s) MMIX1992 IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by L, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS220 package, Model(s) IX followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by C, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, ISOPLUS264 package, Model(s) IX L Series IX, followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by L, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

Semi-conductor diodes, thyristors, IGBT or MOSFETS, SSMPD package, Model(s) MMJX MMJX, followed by 1, 2, 3, followed by B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by number 1-999, followed by N or P, followed by number 1-800, may be followed by up to 6 alpha-numeric characters.

Semi-conductor diodes, thyristors, or MOSFETS, 247 hole-less package, Model(s) DSE (a), IXBR (a), IXGR (a), IXL R (a), IXSR (a), IXTR (a)

Semi-conductor diodes, thyristors, or MOSFETS, ISOPLUS247 package, Model(s) IX followed by one letter B, C, D, E, F, G, H, K, L, S, T, U, X, or Y, followed by R, may be followed by 01-09, 1R1-1R9, 1-9, 10-99, or 100-999 may be followed by N or P, may be followed by 01-10, 1-99 or 100-800, may be followed by up to six alpha-numeric characters.

(a) - Followed by up to 10 numbers and letters.

Marking: Company name and model designation.

Last Updated on 2018-08-29

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC


The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".

Polar3™ HiPerFET™ Power MOSFET


IXFR80N60P3

N-Channel Enhancement Mode
Fast Intrinsic Rectifier



$$\begin{aligned} V_{DSS} &= 600V \\ I_{D25} &= 48A \\ R_{DS(on)} &\leq 85m\Omega \\ t_{rr} &\leq 250ns \end{aligned}$$

ISOPLUS247
E153432



G = Gate D = Drain
S = Source

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	600	V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C , $R_{GS} = 1M\Omega$	600	V
V_{GSS}	Continuous	± 30	V
V_{GSM}	Transient	± 40	V
I_{D25}	$T_C = 25^\circ\text{C}$	48	A
I_{DM}	$T_C = 25^\circ\text{C}$, Pulse Width Limited by T_{JM}	200	A
I_A	$T_C = 25^\circ\text{C}$	40	A
E_{AS}	$T_C = 25^\circ\text{C}$	2	J
dv/dt	$I_S \leq I_{DM}$, $V_{DD} \leq V_{DSS}$, $T_J \leq 150^\circ\text{C}$	35	V/ns
P_D	$T_C = 25^\circ\text{C}$	540	W
T_J		-55 ... +150	$^\circ\text{C}$
T_{JM}		150	$^\circ\text{C}$
T_{stg}		-55 ... +150	$^\circ\text{C}$
T_L	Maximum Lead Temperature for Soldering	300	$^\circ\text{C}$
T_{SOLD}	Plastic Body for 10s	260	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, 1 Minute	2500	V~
F_C	Mounting Force	20..120/4.5..27	N/lb
Weight		5	g

Features

- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- Isolated Mounting Surface
- Low Intrinsic Gate Resistance
- 2500V~ Electrical Isolation
- Dynamic dv/dt Rating
- Avalanche Rated
- Fast Intrinsic Rectifier
- Low Q_G
- Low $R_{DS(on)}$
- Low Drain-to-Tab Capacitance
- Low Package Inductance

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- DC-DC Converters
- Battery Chargers
- Switch-Mode and Resonant-Mode Power Supplies
- Uninterrupted Power Supplies
- AC Motor Drives
- High Speed Power Switching Applications

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$ Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
BV_{DSS}	$V_{GS} = 0V$, $I_D = 1mA$	600		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 8mA$	3.0		5.0 V
I_{GSS}	$V_{GS} = \pm 30V$, $V_{DS} = 0V$			± 200 nA
I_{DSS}	$V_{DS} = V_{DSS}$, $V_{GS} = 0V$ $T_J = 125^\circ\text{C}$			50 μA 4 mA
$R_{DS(on)}$	$V_{GS} = 10V$, $I_D = 40A$, Note 1			85 m Ω


Symbol	Test Conditions ($T_J = 25^{\circ}\text{C}$ Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
g_{fs}	$V_{DS} = 10\text{V}, I_D = 40\text{A}$, Note 1	55	90	S
C_{iss}	$V_{GS} = 0\text{V}, V_{DS} = 25\text{V}, f = 1\text{MHz}$		13.1	nF
C_{oss}			1240	pF
C_{rss}			5.0	pF
R_{Gi}	Gate Input Resistance		1.0	Ω
$t_{d(on)}$	Resistive Switching Times $V_{GS} = 10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 40\text{A}$ $R_G = 1\Omega$ (External)		48	ns
t_r			25	ns
$t_{d(off)}$			87	ns
t_f			8	ns
$Q_{g(on)}$	$V_{GS} = 10\text{V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 40\text{A}$		190	nC
Q_{gs}			56	nC
Q_{gd}			48	nC
R_{thJC}				0.23°C/W
R_{thCS}		0.15		$^{\circ}\text{C/W}$

Source-Drain Diode

Symbol	Test Conditions ($T_J = 25^{\circ}\text{C}$, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
I_S	$V_{GS} = 0\text{V}$			80 A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			320 A
V_{SD}	$I_F = I_S, V_{GS} = 0\text{V}$, Note 1			1.5 V
t_{rr}	$I_F = 40\text{A}, -di/dt = 100\text{A}/\mu\text{s}$ $V_R = 100\text{V}, V_{GS} = 0\text{V}$			250 ns
Q_{RM}			1.4	μC
I_{RM}			13.0	A

Note 1. Pulse test, $t \leq 300\mu\text{s}$, duty cycle, $d \leq 2\%$.

ISOPLUS247 (IXFR) Outline

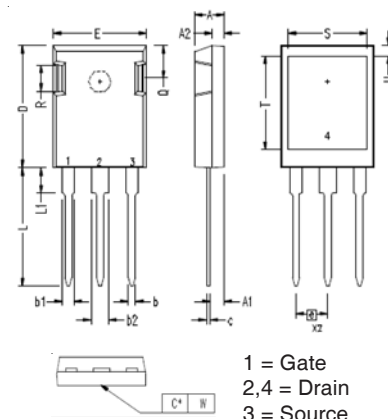

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b1	.075	.085	1.91	2.15
b2	.115	.126	2.92	3.20
C	.024	.033	0.61	0.83
D	.819	.840	20.80	21.34
E	.620	.635	15.75	16.13
e	.215 BSC		5.45 BSC	
L	.780	.811	19.81	20.60
L1	.150	.172	3.81	4.38
Q	.220	.244	5.59	6.20
R	.170	.191	4.32	4.85
S	.520	.540	13.21	13.72
T	.620	.640	15.75	16.26
U	.065	.080	1.65	2.03
W	0	.004	0	0.10

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:	4,835,592	4,931,844	5,049,961	5,237,481	6,162,665	6,404,065 B1	6,683,344	6,727,585	7,005,734 B2	7,157,338B2
	4,860,072	5,017,508	5,063,307	5,381,025	6,259,123 B1	6,534,343	6,710,405 B2	6,759,692	7,063,975 B2	
	4,881,106	5,034,796	5,187,117	5,486,715	6,306,728 B1	6,583,505	6,710,463	6,771,478 B2	7,071,537	

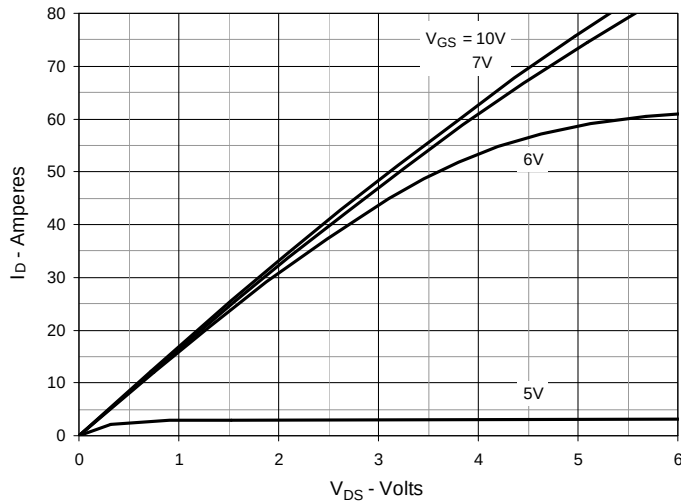
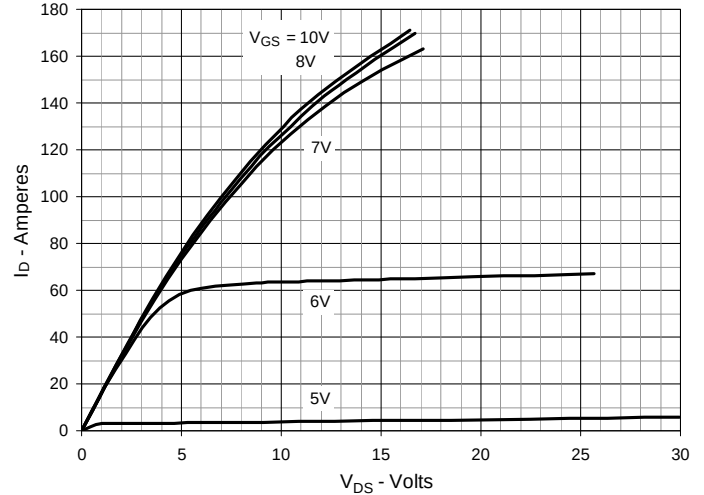
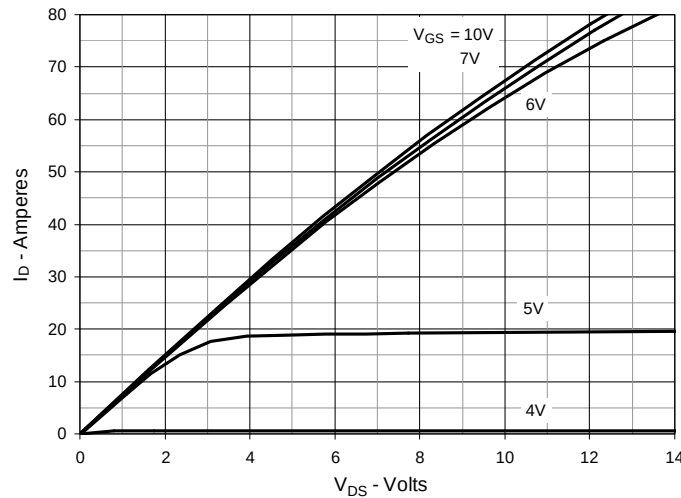
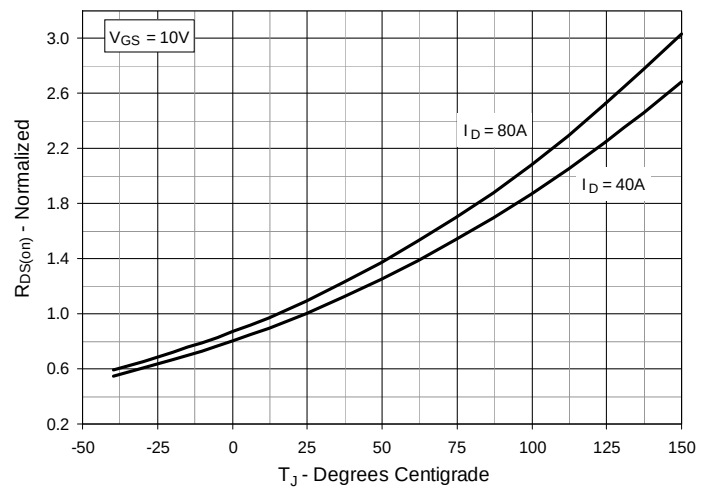
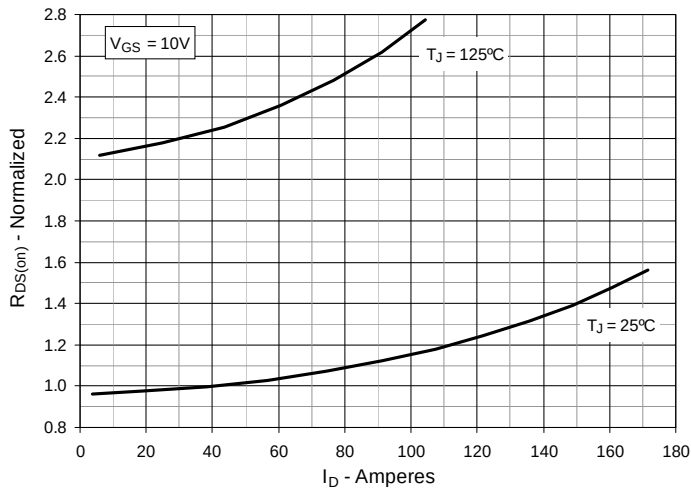
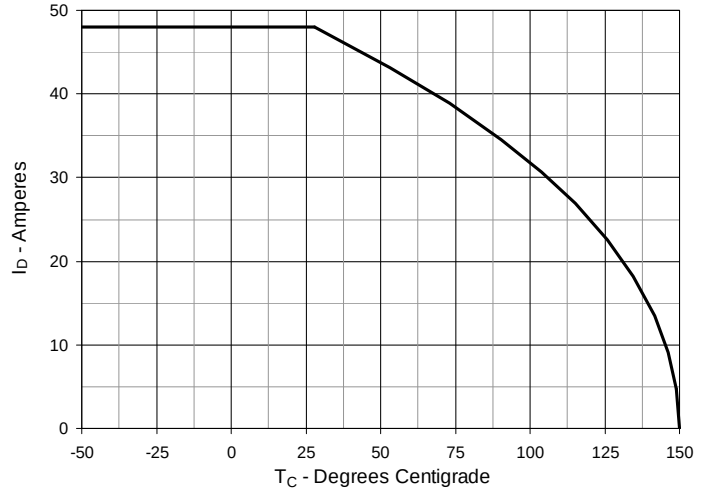
Fig. 1. Output Characteristics @ $T_J = 25^\circ\text{C}$

Fig. 2. Extended Output Characteristics @ $T_J = 25^\circ\text{C}$

Fig. 3. Output Characteristics @ $T_J = 125^\circ\text{C}$

Fig. 4. $R_{DS(on)}$ Normalized to $I_D = 40\text{A}$ Value vs. Junction Temperature

Fig. 5. $R_{DS(on)}$ Normalized to $I_D = 40\text{A}$ Value vs. Drain Current

Fig. 6. Maximum Drain Current vs. Case Temperature


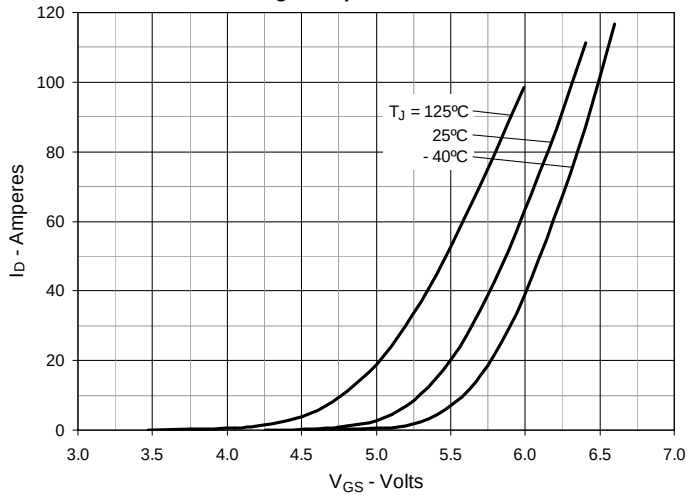
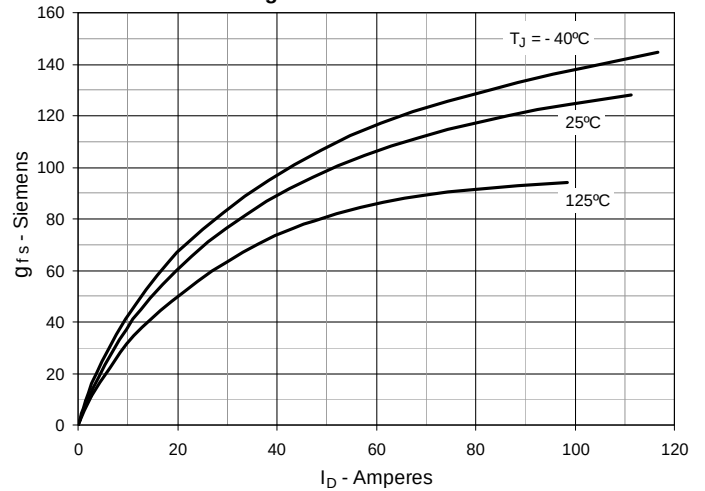
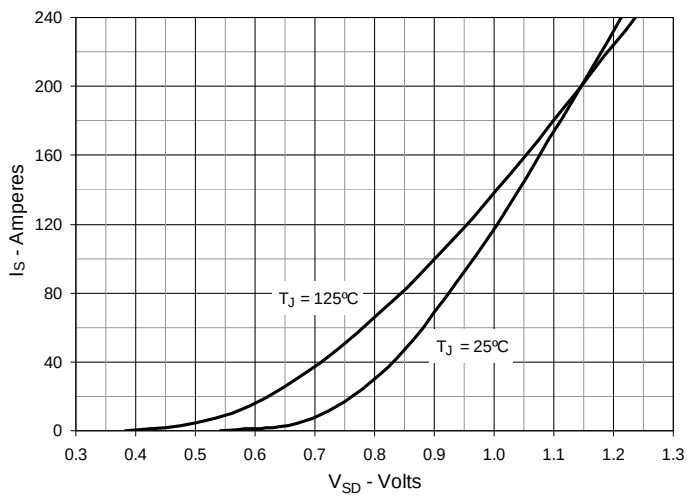
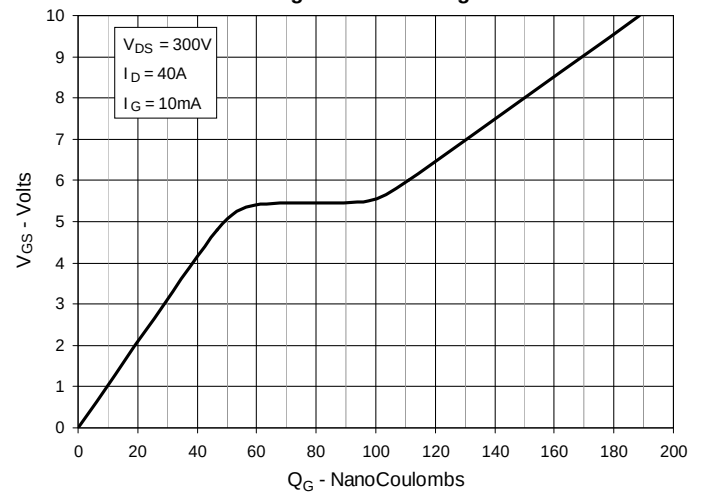
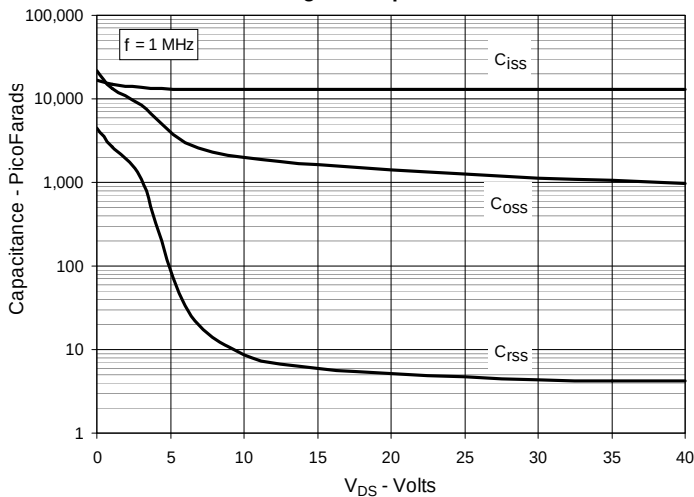
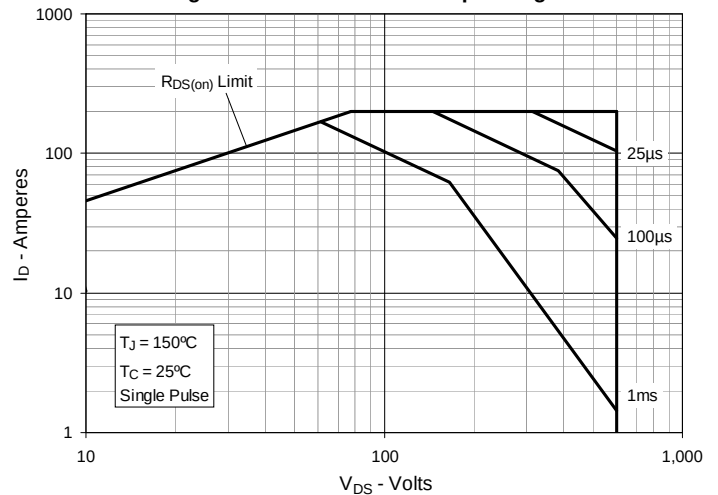
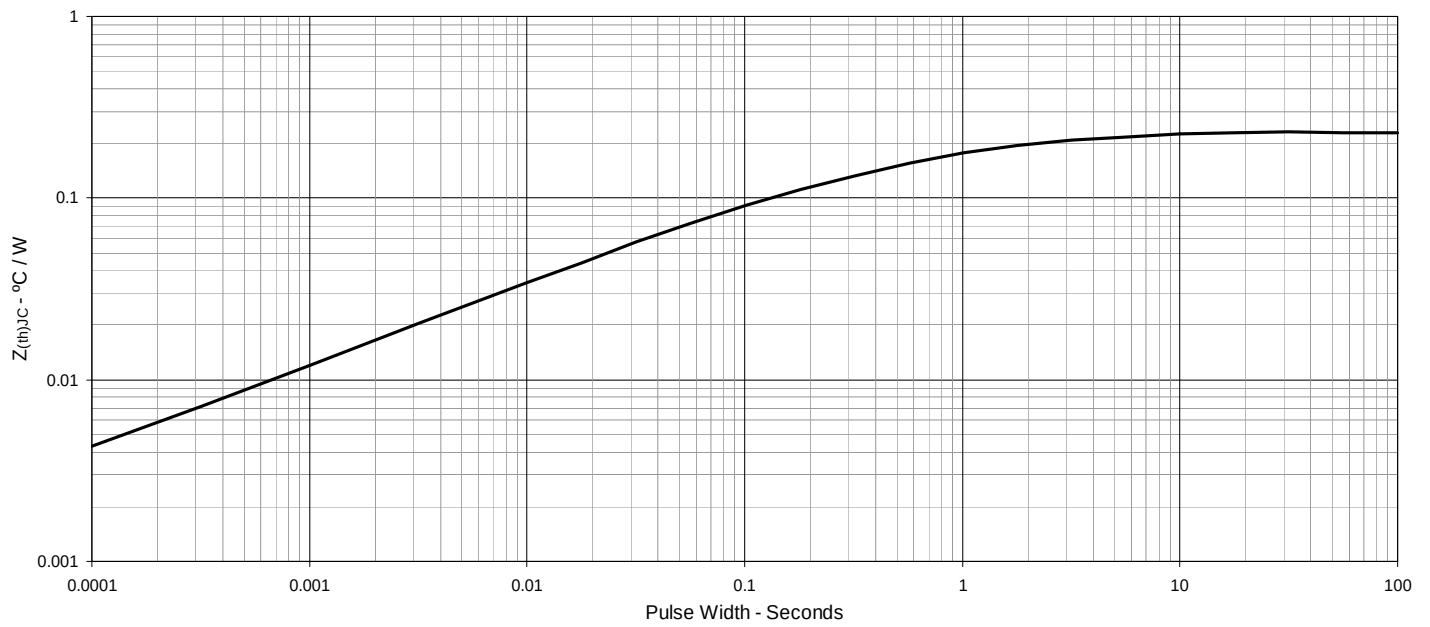
Fig. 7. Input Admittance

Fig. 8. Transconductance

Fig. 9. Forward Voltage Drop of Intrinsic Diode

Fig. 10. Gate Charge

Fig. 11. Capacitance

Fig. 12. Forward-Bias Safe Operating Area


Fig. 13. Maximum Transient Thermal Impedance





Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.